

# PSU15D SERIES

## Desktop power supply

### Features:

- Universal input voltage
- Single output
- Pass Ips
- Optional output connectors
- Short circuit protection
- High efficiency & reliability
- Compact low profile package
- One year warranty


### SAFETY AGENCY APPROVALS



Specifications:	PSU15D Series:
Input voltage	100-240 VAC (Limits: 90-264VAC)
Input frequency	47 to 63Hz
Input current	0.43A (rms) for 115VAC, 0.23A (rms) for 230 VAC
Safety ground leakage current	0.25mA max @ 240 VAC 50Hz
Output voltage	See rating chart ( $\pm 5\%$ tolerance)
Output current	See rating chart
Output power range	15 watts Max
Ripple	1 % peak to peak maximum
Over voltage protection	N/A
Over current protection	All outputs protected to short circuit conditions
Temperature coefficient	All outputs $\pm 0.04\%$ maximum
Transient response	Maximum excursion of 4% or better on all models. recovering to 1% of final value within 500uS after a 25% step load change
Operating temperature	0° C ~+40° C
Storage temperature	-40° C to + 85° C
Relative humidity	5% to 95% non-condensing
Derating	Derated from 100% at +40° C linearly to 50% at 70° C
Efficiency	65% minimum at full output
Hold-up time	10 msec minimum
Line regulation	$\pm 1.0\%$ maximum for any input voltage change between input voltage range
Load regulation	$\pm 5\%$ variations from minimum to maximum output current.
Insulation resistance	50 M ohm minimum from output to ground
Inrush current	15 AMPS @ 115 VAC, or 30 AMPS @ 230 VAC at 25° C cold start
Withstand voltage	4242VDC from input to output
Mean time between failure	50,000 hours minimum at full load at 25° C ambient
EMI requirements	Meets conduction limits of: CISPR 22.2
Safety requirements	Meets or exceeds: (a) UL 1950 (B) CSA C22.2 (C) TUV En60950 IEC950
Warranty	1 year

# PSU15D SERIES

UNIT: mm

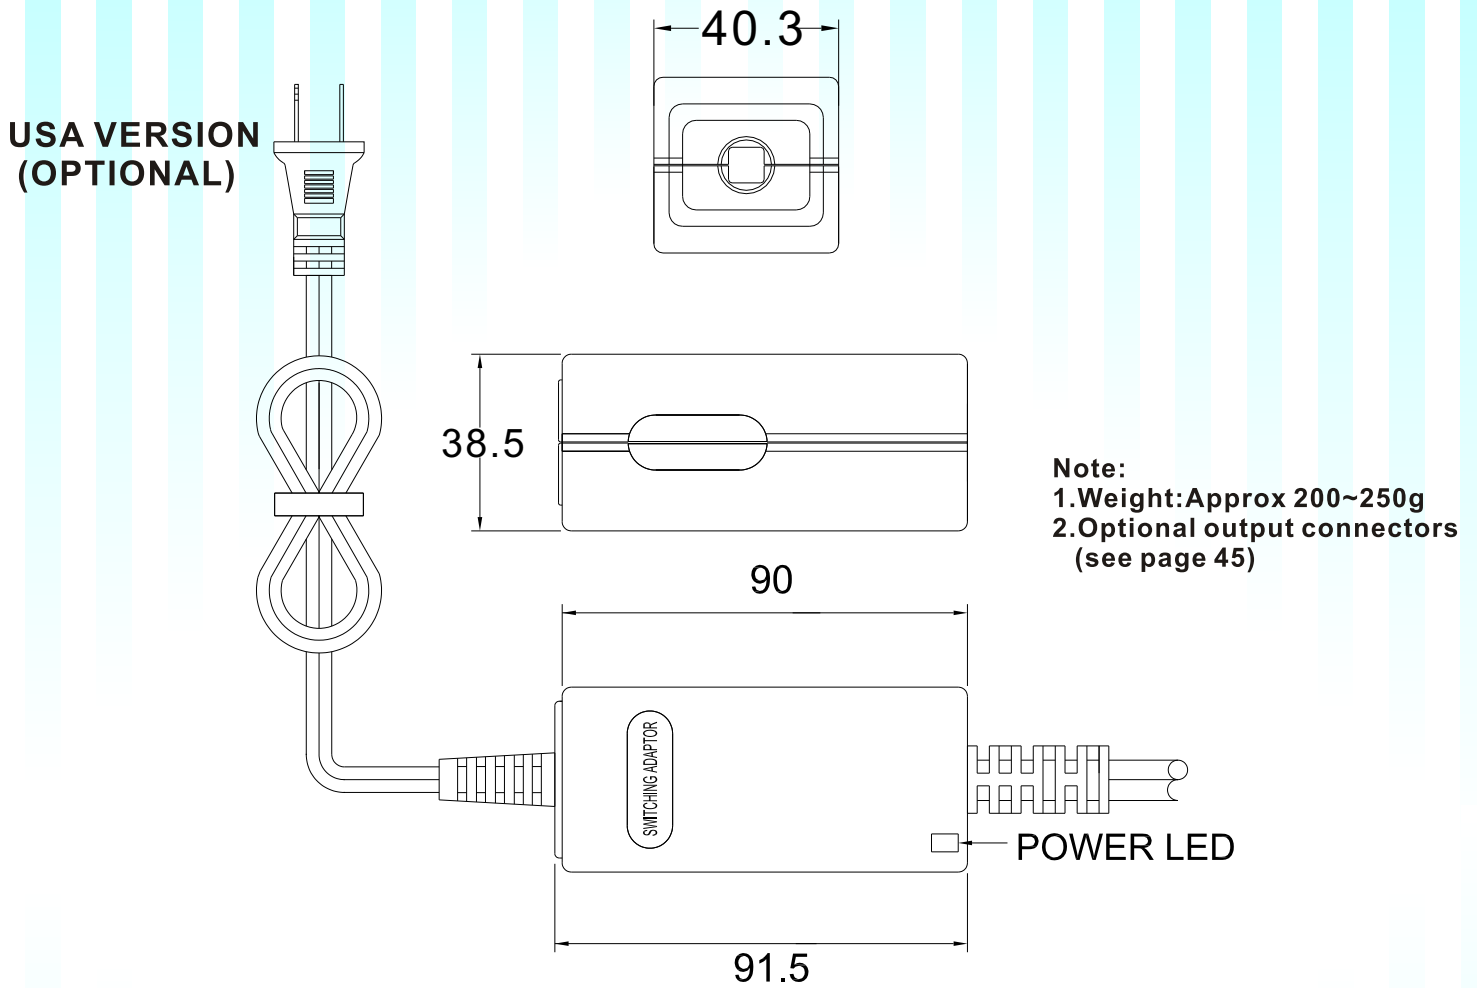

**X** = **U** America Type(FIG 1) or **E** Europe Type(FIG 2) or OTHER

★★Please specify output voltage when ordering.

Model	Output Voltage	Output Current	Maximum Output Power
PSU15D-0-X	3~5 VDC	2.40~1.44A	7.2W
PSU15D-1-X	5~6 VDC	2.40~2.00A	12W
PSU15D-1-1-X	6~8 VDC	2.00~1.50A	12W
PSU15D-2-X	8~11VDC	1.87~1.36A	15W
PSU15D-3-X	11~13VDC	1.36~1.15A	15W
PSU15D-4-X	13~16VDC	1.15~0.94A	15W
PSU15D-5-X	16~21VDC	0.94~0.72A	15W
PSU15D-6-X	21~27VDC	0.72~0.55A	15W
PSU15D-7-X	27~33VDC	0.55~0.45A	15W
PSU15D-8-X	33~48VDC	0.45~0.31A	15W