

Desktop power supply

Features:

- Universal input voltage
- Single output
- Optional output connectors
- Over voltage protection
- Over current protection
- Over Temperature protection
- High efficiency & reliability
- Compact package
- Possess risk analysis report
- Meet 60601-1 3rd edition
- Two years limited warranty

SAFETY AGENCY APPROVALS:



Specifications:	MPU50A,C series:
Input voltage	100~240VAC
Input frequency	50~60Hz (Limits:47~63Hz)
Input current	1.5A Max.
leakage current	0.3mA Max.@240VAC/50Hz
Output voltage	See rating chart ($\pm 5\%$ tolerance)
Output current	See rating chart
Output power range	50 watts Max.
Ripple	1% peak to peak maximum
Over voltage protection	Provided on outputs set at 112~132% of its nominal output voltage
Over current protection	All outputs protected to short circuit conditions
Over Temperature protection	130°C Activated
Temperature coefficient	All output $\pm 0.04\%/\text{°C}$ maximum
Transient response	Maximum excursion of 4% or better on all models. Recovering to 1% of final value within 500uS after a 25% step load change
Operating temperature	0°C ~+40°C
Storage temperature	-40°C ~+85°C
Relative humidity	5% to 95% non-condensing
Derating	Derated from 100% at + 40°C linearly to 70% at 50°C
Efficiency	65% minimum at full output
Hold - up time	10msec minimum
Line regulation	$\pm 1\%$ maximum for any input voltage change between input voltage range
Load regulation	$\pm 5\%$ variations from minimum to maximum output current.
Insulation resistance	50Mohm minimum from input to output
Inrush current	15AMPS@115 VAC or 90AMPS @ 230VAC at 25°C cold start
Withstand voltage	5656VDC from input to output
Mean time between failure	100,000 hours minimum at full load at 25°C ambient
EMI requirements	Meet CE standards
Safety requirements	Meets or Exceeds(A)UL: ES60601-1:2005 (B)CSA: C22.2 NO.60601-1:2008 (C)CB: IEC 60601-1:2005 (D)EN:EN60601-1:2006
Warranty	2 years

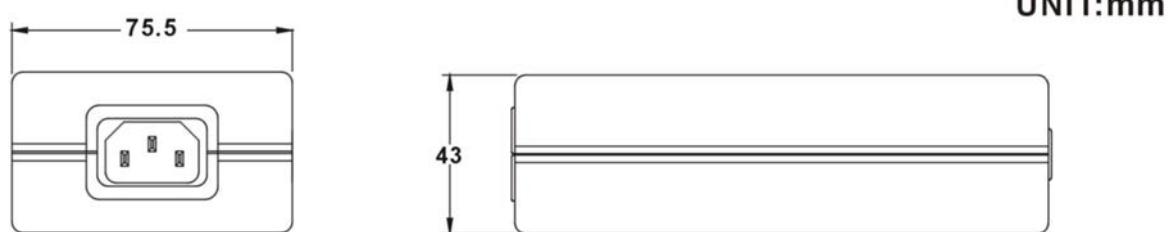


FIG1







FIG2

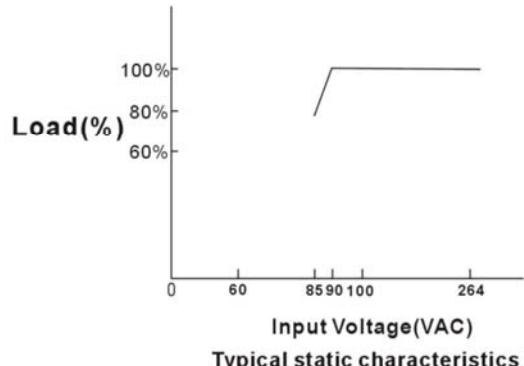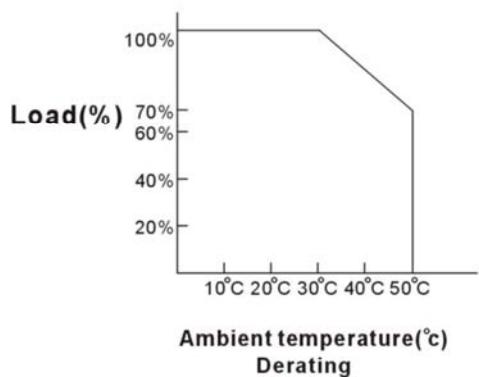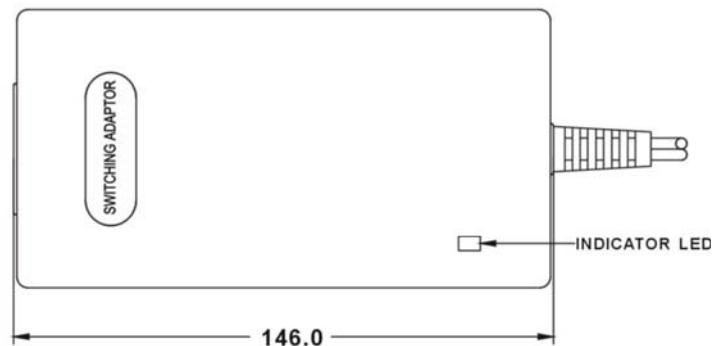

X=A= (C14 FIG1) or C=(C6 FIG2)

Model name	Output Voltage(VDC)	Output Current(A)	Max. Output Power (W)	Ripple(mV) Max.	Line Regulation (%)	Load Regulation (%)	Efficiency (%) (min)	No load Power Consumption(W)
MPU50X-0	3~5	7.5	37.5	50	±1	±8	60	3.3
MPU50X -1	5~6	7.50~6.25	37.5	50	±1	±6	67	5
MPU50X -1-1	6~8	6.66~5.00	40	75	±1	±5	70	7.5
MPU50X -2	8~11	5.62~4.09	45	90	±1	±5	72	9
MPU50X -3	11~13	4.54~3.84	50	100	±1	±5	74	12
MPU50X -4	13~16	3.84~3.12	50	100	±1	±3	75	15
MPU50X -5	16~21	3.12~2.38	50	150	±1	±3	78	18
MPU50X -6	21~27	2.38~1.85	50	150	±1	±2	78	24
MPU50X -7	27~33	1.85~1.51	50	200	±1	±2	78	28
MPU50X -8	33~48	1.51~1.04	50	200	±1	±2	80	48

Note:

(1) Weight: Approx 510~560g

(2)Optional output connectors (see page 75)